

### DETERMINE THE UPSTAND RANGE

Please measure the height from the frame upper side to the sash bottom side and choose the fitting upstand:

13–18 mm 13.5–18.5 mm	15–20 mm 16.5–21.5 mm
18–23 mm 19.5–24.5 mm	20–25 mm mm mm


## 2 DETERMINE THE FRAME HINGE PART

Please tick the correct width of the frame hinge part:



### OETERMINE THE BEARING PIN

Please remove the upper cap and cross off as applicable:

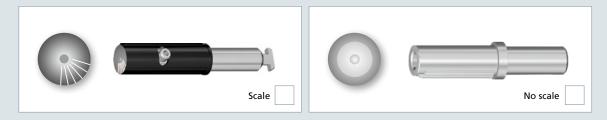

# 4 TYPE OF FASTENING


Please unscrew the marked screw and mark the type of screw:


Countersunk head tapping screw	Countersunk screw Metric thread M5 = Fix fastening	Drilling screw



## 5 DETERMINE THE HINGE TYPE

Is the hinge on the door flashover fastened with an angle nook?





#### How does the metal cover cap fit onto the sash?



#### How long is the sash?

