# Dr. Hahn

englisch

## Declaration of performance

## 1309-CPR-0343

1.	Door hinge model:	KT-EV/KT-EN, in 2 parts

- 2. Ident. No.: P207\_00XX, P206\_00XX, K200E0021
- 3. Intended use: Doors
- 4. Manufacturer: Dr. Hahn GmbH & Co. KG Postfach 30 01 09 41181 Mönchengladbach
- 5. System for the assessment of the constancy of performance: 1
- 6. Harmonised standard: EN 1935:2002/AC:2003
- 7. Notified body: PIV, No. 1309, Prüfinstitut Schlösser und Beschläge, Velbert (Germany) as the notified testing lab in accordance with EN 1935:2002 has performed the initial test regarding 8.1 to 8.9 and has prepared the classification reports

#### 8. Essential characteristics:

Essential characteristic	Performance	Harmonised technical specification
8.1 Usage class	4	EN 1935:2002/AC:2003
8.2 Test cycles in case of continuous	200.000	EN 1935:2002/AC:2003
operation		
8.3 Mass of the door	120 kg	EN 1935:2002/AC:2003
8.4 Fire resistance	0	EN 1634-1
8.5 Safety	1	EN 1935:2002/AC:2003
8.6 Corrosion resistance	0/4/5	Klasse 0 = unbeschichtete
DIN EN 1670:2007		Produkte
		Klasse 4 = 240 h
		Klasse 5 = 480 h
8.7 Anti-burglary resistance/protection	1	EN 1935:2002/AC:2003
8.8 Hinge class	13	EN 1935:2002/AC:2003
8.9 Dangerous substances	-	EN 1935:2002/AC:2003

9.

The performance of the product listed under Nos. 1 and 2 corresponds to the declared performance listed under No. 8.

Signed for the manufacturer and on behalf of the manufacturer by:

Eckhard Meyer Managing Director Mönchengladbach, 02.06.2017





# Zertifikat der Leistungsbeständigkeit

## 1309 - CPR - 0343

In Übereinstimmung mit der EU-Verordnung Nr. 305/2011 des Europäischen Parlaments und des Rates vom 9. März 2011 (Bauproduktenverordnung oder CPR) gilt dieses Zertifikat für das Bauprodukt

#### Einachsiges Türband KT-EV/KT-EN Direktbefestigung

Artikelnummern siehe Produktmatrix

Ausführung: 2-teiliges Aufschraubband

auf den Markt gebracht unter dem Namen oder der Handelsmarke von

#### Dr. Hahn GmbH & Co. KG Trompeterallee 162-170 D-41189 Mönchengladbach

und produziert in der Produktionsstätte

#### D-41189 Mönchengladbach Trompeterallee 162-170

Dieses Zertifikat bescheinigt, dass alle Bestimmungen zur Bewertung und Überprüfung der Leistungsbeständigkeit laut der Beschreibung in Anhang ZA der Norm

## EN 1935:2002/AC:2003

im Rahmen des Systems 1 für die Leistung laut den Angaben in diesem Zertifikat angewendet werden, und dass

#### die Leistung des Bauprodukts als beständig bleibend bewertet wird.

Produkt Klassifizierungsschlüssel

4	7	6	0	1	0/4(5*)	1	13
Eignung fü	ir die Verwendur	g an Türen in Re	ltungswegen				
		beschichtete Pro		EN 1670:200	7		
Stelle 6: Kl	asse 5 DIN EN 1	670:2007 für O	berfläche Verke	hrsweiß RAL 9	016, Nasslack Titan	Ν	

Dieses Zertifikat wurde erstmals am **03. Januar 2017** ausgestellt und bleibt gültig, bis entweder die harmonisierte Norm, das Bauprodukt, das System zur Bewertung und Überprüfung der Leistungsbeständigkeit oder die Produktionsbedingungen im Werk wesentlich verändert werden, oder bis das Zertifikat von der benannten Zertifizierungsstelle ausgesetzt oder zurückgenommen wird.

D-Velbert, 08. Mai 2017

Dieses Zertifikat hat insgesamt 4 Seiten.



Oliver Troska, Dipl.-Ing. (FH) Leiter der Zertifizierungsstelle





## Anlage zum Zertifikat der Leistungsbeständigkeit

## 1309 - CPR - 0343

Wesentliche Merkmale	Abschnitte dieser Europäischen Norm	Mandatierte Stufen und/oder Klassen	Anmerkungen
Selbstschließend Anfangsmessungen des Reibmomentes	5.1		≤ 4 Nm
Belastung-Verformung	5.2.1		
Seitliche/Vertikale Verschiebung unter Belastung			bestanden
Seitliche/Vertikale Verschiebung nach dem Entlasten			liegt innerhalb der gerasterten Fläche in Bild G.1
Überbelastung	5.2.2		bestanden
Eignung für Brand- und/ oder Rauchschutztüren	5.6	keine	npd
Dauerfunktionstüchtigkeit Dauerbetriebsprüfung	5.4		Klasse 7 / 200.000 Zyklen
Seitlicher/Vertikaler Verschleiß			liegt innerhalb der gerasterten Fläche in Bild G.2
Max. zulässiges Reibmoment - nach 20 Zyklen			≤ 4 Nm
- nach Ende der Prüfung			≤ 4 Nm
Korrosionsbeständigkeit	5.5		unbeschichtet Klasse 0, beschichtet Klasse 5 für Oberfläche Verkehrsweiß RAL 9016, Nasslack Titan N nach EN 1670
Gefährliche Substanzen	ZA.1		Der Hersteller erklärt, dass das Produkt keine gefährlichen Stoffe enthält oder freisetzt, die die in den europäischen Normen und in nationalen Vorschriften festgelegten Höchstwerte überschreiten.



Oliver Troska, Dipl.-Ing. (FH) Leiter der Zertifizierungsstelle






## Anlage zum Zertifikat der Leistungsbeständigkeit

## 1309 - CPR - 0343

#### **Produktmatrix**

Produktbezei	chnung	KT-EV Direktbefestigung						
Artikel-Nr.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	Teiligkeit [Stk.]	EN 1935 [Klasse]	
P207_00XX	74	27	13,5	30	12	2	13	
P207_00XX	74	27	13,5	30	15	2	13	
P207_00XX	74	27	13,5	33	15	2	13	
P207_00XX	74	27	13,5	30	20	2	13	
P207_00XX	74	27	13,5	31,5	20	2	13	
P207_00XX	74	27	13,5	33	20	2	13	
P207_00XX	74	27	13,5	34,5	20	2	13	
P207_00XX	74	27	13,5	37	20	2	13	
K200E0021		optional						

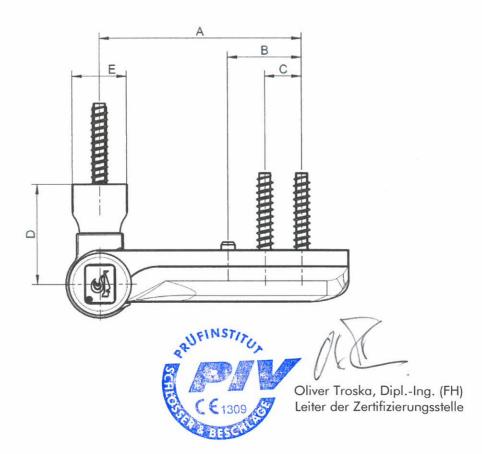




**CE** 

## Anlage zum Zertifikat der Leistungsbeständigkeit

## 1309 - CPR - 0343

#### **Produktmatrix**

Produktbezeichnung			KT-EN Dir	ektbefestig	ung		
Artikel-Nr.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	Teiligkeit [Stk.]	EN 1935 [Klasse]
P206_00XX	74	27	13,5	30	20	2	13
P206_00XX	74	27	13,5	31,5	20	2	13
P206_00XX	74	27	13,5	33	20	2	13
P206_00XX	74	27	13,5	34,5	20	2	13
P206_00XX	74	27	13,5	37	20	2	13
K200E0021		optional					

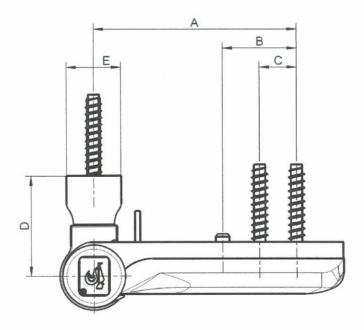



Oliver Troska, Dipl.-Ing. (FH) Leiter der Zertifizierungsstelle



**CE** 

Dieses Dokument ist eine Übersetzung des Zertifikates durch Dr. Hahn GmbH & Co KG

## **Certificate of constancy of performance**

### 1309 - CPR - 0343

In accordance with EU Regulation No. 305/2011 of the European Parliament and the Council dated 09.03.2011 (Construction Product Regulation - CPR), this certificate is valid for the construction product

#### 1-axis door hinge KT-EV / KT-EN

direct installation with screws Item number: c.f. product matrix

#### **Construction: 2-piece**

brought on the market under the name or brand name of

#### Dr. Hahn GmbH & Co. KG Trompeterallee 162-170 41189 Mönchengladbach

and produced at production site

#### 41189 Mönchengladbach Trompeterallee 162-172

This certificate confirms that all provisions regarding the assessment and verification of the of the constancy of performance in accordance with the description in Annex ZA of the standard

## EN 1935:2002/AC:2003

are applied in the context of System 1 for the performance in accordance with the specifications in this certificate, and that

the performance of this construction product has been assessed as remaining unchanged.

#### Produkt Klassifizierungsschlüssel

4	7	6	0	1	0/4(5*)	1	13
Suited for installation on doors placed along emergency escape routes Position 6: Grade 0 for non-coated products according to DIN EN 1670:2007							
Position 6: class 5 according to DIN EN 1670:2007 for surface traffic white RAL 9016, liquid coating Hahn Titan N							

This certificate was issued for the first time on 03.01.2017 and remains valid until either the harmonised standard, the construction product, the system for the assessment and verification of the constancy of performance, or the production conditions at the factory are changed significantly, or until the certificate is suspended or withdrawn by the stated certification office.





This document is a translation of the certificate by Dr. Hahn GmbH & Co. KG.

#### Attachment to the certificate of constancy of performance

### 1309 - CPR - 0343

Essential characteristics	Sections of this European Norm	Mandated levels and/or grades	Comments
Self-locking Initial measurements of frictional torque	5.1		4Nm
Stress - deformation	5.2.1		
Lateral/vertical shifting under stress			passed
Lateral/vertical shifting after being relieved			is located within the rasterized area in the picture G.1
Overloading	5.2.2		passed
Suitability for fire doors and/or smoke doors	5.6		npd
Durable functionality Continuous service test	5.4	none	Category 7 I 200.000 Cycles
Lateral/vertical wear			is located within the rasterized area in the picture G.2
Max. permissible frictional torque after 20 cycles			4Nm
after the end of the test			4Nm
Corrosion resistance	5.5		non-coated grade 0, coated Category 7 for surface traffic white RAL 9016, liquid coating Titan N in accordance with EN 1670
Hazardous substances	ZA.I		The manufacturer declares that the product does not contain or release hazardous substances that exceed the maximum values specified in the European Norms and in national regulations.

Englisch

# Dr. Hahn

Englisch

#### **Declaration of Conformity**

REACH Regulation EC 1907/2006

Dear customer,

On 1 June 2007, the EC Regulation 1907/2006 to register, evaluate, authorise and restrict <u>chemical</u> <u>substances</u> (REACH) entered into force. The aim is to register and evaluate all chemicals used in the European Union.

Dr. Hahn GmbH & Co. KG manufactures door hinges and is thus a manufacturer of "products". We do not produce chemical substances ourselves, rather, we utilise them exclusively as aids in our production. Being such a "downstream user", we are not obligated to do any pre-registration ourselves; we depend, however, on our upstream suppliers' information and, in particular, registration of the chemical substances being used. The pre-registration phase, which ended on 1 December 2008, has been concluded in the meantime and so far has not resulted in any recognisable restrictions to our product and service programs.

Based on our current knowledge and the information provided by our upstream suppliers to date, the products we have so far supplied to you do not contain any substances that are included in the <u>List of</u> <u>Substances of Very High Concern (SVHC; of 20 June 2013)</u> as regards Annex XIV of the REACH Regulation.

This product information is based on the current state of our knowledge and experiences.

We are happy to answer any further questions you may have.

Best regards, Dr. Hahn GmbH & Co. KG

Ulli Cremers QMB

Mönchengladbach, den 24.06.2013